



# ENERG

енергия · ενεργεια

Y IJA  
IE IA

10764701

CTA

Aeroheat CI-16i




55 °C

35 °C

**A++**

**A++**

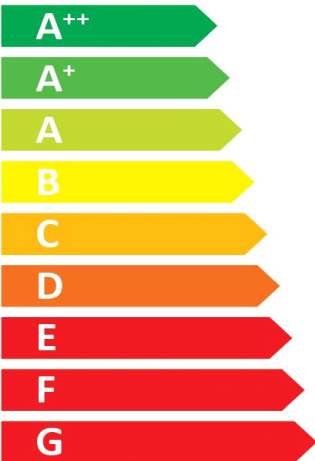

**57** dB



**40** dB

■ 14  
■ **12**  
■ 15  
kW

■ 14  
■ **11**  
■ 14  
kW



2015

811/2013



# ENERG

енергия · ενέργεια

Y

IJA

IE


IA

55°C

10764701

Aeroheat CI-16i

CTA



A++

A+++

A++

A++

A+

A

B

C


D

E

F

G

+



+



+



+



**Package (heat pumps and combination heater with heat pump)**

Seasonal space heating energy efficiency of heat pump ( $\eta_S$ ) ① 133 %

Rated output of the heat pump ( $P_{rated}$  kW) 12.47

Temperature control Class VII (Table 1) + ② 3.5 %

Supplementary boiler  
 Package with hot water storage tank no  $P_{sup}$  kW (rated output of supplementary heater)

$\eta_S$  % (sup) = - ③ %

$(\eta_S \% (sup) - ①) \times (\alpha_{WE})$

$(\alpha_{WE})$

Solar contribution  $(A_{Koll} m^2)$   $(\eta_{Koll} \%)$


$(V_{Sp} m^3)$  **(standstill heat loss of the storage tank in W)**

$(\eta_{Sp})$

$((294/(P_{rated} \times 11)) \times (A_{Koll} m^2) + (115/(P_{rated} \times 11)) \times (V_{Sp} m^3)) \times 0.45 \times ((\eta_{Koll} \%) / 100) \times (\eta_{Sp})$  = + ④ %

Seasonal space heating energy efficiency of package under average climate ⑤ 137 %  
*rounded to the nearest integer*


Seasonal space heating energy efficiency class of package under average climate

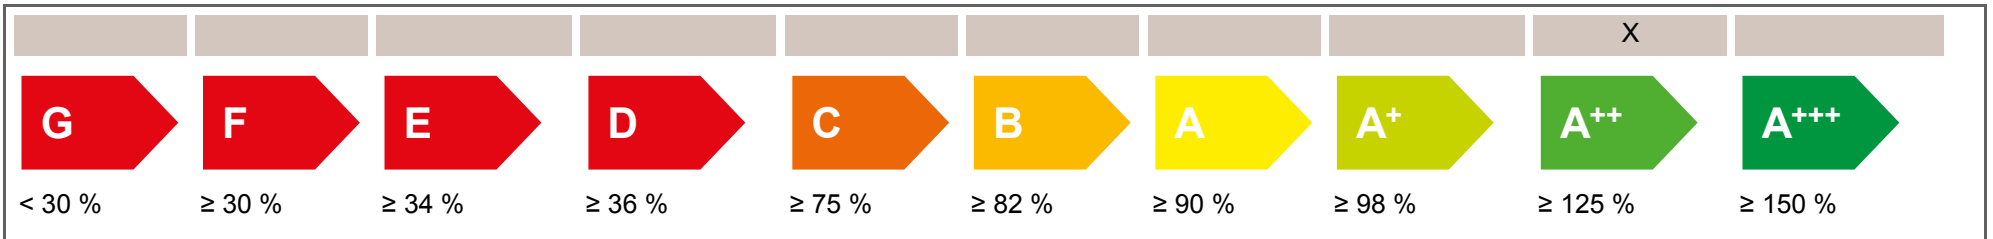



Seasonal space heating energy efficiency under colder and warmer climate conditions

colder	125 %		colder	⑤	137	-V	8	=	129 %
warmer	158 %		warmer	⑤	137	+VI	25	=	162 %

The energy efficiency of the package of products provided for in this fiche may not correspond to its actual energy efficiency once installed in a building, as the efficiency is influenced by further factors such as heat loss in the distribution system and the dimensioning of the products in relation to building size and characteristics.

<b>Product fiche</b>		 <b>AC Cooling Heating</b>	
<b>Manufacturer</b>	CTA AG		
<b>Model</b>	AH CI 1-16i		
<b>Information on energy efficiency class and rated output</b>			
	Average / Low temperature	Average / Medium temperature	
Space heating energy efficiency class	A++	A++	-
Rated heat output	10.95	12.47	kW
Seasonal space heating energy efficiency	165	133	%
Annual final energy consumption space heating	5493	7690	kWh
Sound power level indoors	57		dB
<b>Special precautions during assembly, installation or maintenance</b>			
see installation and maintenance instructions			
<b>Additional information</b>			
	Low temperature	Medium temperature	
Rated heat output colder climate	13.58	14.43	kW
Rated heat output warmer climate	14.08	14.83	kW
Seasonal space heating energy efficiency colder climate	151	125	%
Seasonal space heating energy efficiency warmer climate	198	158	%
Annual final energy consumption colder climate	8935	11456	kWh
Annual final energy consumption warmer climate	3923	5138	kWh
Sound power level outdoors	40		dB
<b>Technical data of the temperature controller</b>			
<b>Manufacturer</b>	ait		
<b>Model</b>	Aeroplus 2.1		
Class of the controller	VII		-
Contribution of the controller to seasonal space heating energy efficiency	3.5		%
<b>Contact</b>	CTA AG, Hunzigenstrasse 2, CH-3110 Münsingen		

<b>Model</b>				<b>AH CI 1-16i</b>						
Brine-to-water heat pump: (Yes/No)				No						
Water-to-water heat pump: (Yes/No)				No						
Air-to-water heat pump: (Yes/No)				Yes						
Low temperature heat pump: (Yes/No)				No						
Equipped with supplementary heater: (Yes/No)				Yes						
Heat pump combination heater: (Yes/No)				No						
Application: (Low temperature/Medium temperature)				Medium temperature						
Climate: (Colder/Average/Warmer)				Average						
<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>	<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>			
<b>Rated heat output</b>	Prated	12.47	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_S$	133	%			
<b>Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature Tj</b>				<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>						
Tj = -7°C	Pdh	12.50	kW	Tj = -7°C	COPd	2.28	-			
Tj = +2°C	Pdh	6.60	kW	Tj = +2°C	COPd	3.35	-			
Tj = +7°C	Pdh	5.20	kW	Tj = +7°C	COPd	4.06	-			
Tj = +12°C	Pdh	5.30	kW	Tj = +12°C	COPd	5.28	-			
Tj = biv	Pdh	12.50	kW	Tj = biv	COPd	2.28	-			
Tj = TOL	Pdh	10.60	kW	Tj = TOL	COPd	1.92	-			
Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	Tj = -15°C if TOL < -20°C)	COPd	-	-			
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C			
Cycling interval capacity for heating	P <sub>cy</sub>	-	kW	Cycling interval efficiency	COP <sub>cy</sub>	-	-			
Degradation co-efficient	Cdh	1	-	Heating water operating limit temperature	WTOL	65	°C			
<b>Power consumption in modes other than active mode</b>				<b>Supplementary heater</b>						
Off mode	P <sub>OFF</sub>	0.024	kW	Rated heat output	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.024	kW	Type of energy input	electric					
Standby mode	P <sub>SB</sub>	0.024	kW							
Crankcase heater mode	P <sub>CK</sub>	0	kW							
<b>Other items</b>										
Capacity control	variable			Rated air flow rate, outdoors	-	4400	m <sup>3</sup> /h			
Sound power level, indoors/outdoors	L <sub>WA</sub>	57/40	dB	Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h			
Emissions of nitrogen oxides	NO <sub>x</sub>	-	mg/kWh							
<b>For heat pump combination heater</b>										
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%			
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh			
<b>Contact</b>	CTA AG, Hunzigenstrasse 2, CH-3110 Münsingen									

<b>Model</b>				<b>AH CI 1-16i</b>						
Brine-to-water heat pump: (Yes/No)				No						
Water-to-water heat pump: (Yes/No)				No						
Air-to-water heat pump: (Yes/No)				Yes						
Low temperature heat pump: (Yes/No)				No						
Equipped with supplementary heater: (Yes/No)				Yes						
Heat pump combination heater: (Yes/No)				No						
Application: (Low temperature/Medium temperature)				Low temperature						
Climate: (Colder/Average/Warmer)				Average						
<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>	<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>			
Rated heat output	Prated	10.95	kW	Seasonal space heating energy efficiency	$\eta_S$	165	%			
<b>Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature Tj</b>				<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>						
Tj = -7°C	Pdh	11.00	kW	Tj = -7°C	COPd	2.76	-			
Tj = +2°C	Pdh	6.50	kW	Tj = +2°C	COPd	4.40	-			
Tj = +7°C	Pdh	5.10	kW	Tj = +7°C	COPd	4.89	-			
Tj = +12°C	Pdh	4.90	kW	Tj = +12°C	COPd	5.30	-			
Tj = biv	Pdh	11.00	kW	Tj = biv	COPd	2.76	-			
Tj = TOL	Pdh	11.20	kW	Tj = TOL	COPd	2.62	-			
Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	Tj = -15°C if TOL < -20°C)	COPd	-	-			
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C			
Cycling interval capacity for heating	P <sub>cy</sub>	-	kW	Cycling interval efficiency	COP <sub>cy</sub>	-	-			
Degradation co-efficient	Cdh	1	-	Heating water operating limit temperature	WTOL	65	°C			
<b>Power consumption in modes other than active mode</b>				<b>Supplementary heater</b>						
Off mode	P <sub>OFF</sub>	0.024	kW	Rated heat output	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.024	kW	Type of energy input	electric					
Standby mode	P <sub>SB</sub>	0.024	kW							
Crankcase heater mode	P <sub>CK</sub>	0	kW							
<b>Other items</b>										
Capacity control	variable			Rated air flow rate, outdoors	-	4400	m <sup>3</sup> /h			
Sound power level, indoors/outdoors	L <sub>WA</sub>	57/40	dB	Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h			
Emissions of nitrogen oxides	NO <sub>x</sub>	-	mg/kWh							
<b>For heat pump combination heater</b>										
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%			
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh			
<b>Contact</b>	CTA AG, Hunzigenstrasse 2, CH-3110 Münsingen									