



# ENERG

енергия · ενεργεια



I - Klima - Kälte - Wärme || OH 28e Duo HT - S/W Art.Nr.: B11244



55 °C

35 °C



54 dB



--- dB

■ 26  
■ **26**  
■ 26  
kW

■ 28  
■ **28**  
■ 28  
kW



**Package (heat pumps and combination heater with heat pump)**

Seasonal space heating energy efficiency of heat pump ( $\eta_S$ ) ① 131 %

Rated output of the heat pump ( $P_{rated}$  kW) 24.90

Temperature control Class VII (Table 1) + ② 3.5 %

Supplementary boiler

Package with hot water storage tank no  $P_{sup}$  kW (rated output of supplementary heater)

$\eta_S$  % (sup) = - ③ %

$(\eta_S \% (sup) - ①) \times (\alpha_{WE})$

$(\alpha_{WE})$

Solar contribution  $(A_{Koll} m^2)$   $(\eta_{Koll} \%)$

$(V_{Sp} m^3)$   $(standstill\ heat\ loss\ of\ the\ storage\ tank\ in\ W)$


$(\eta_{Sp})$

$((294/(P_{rated} \times 11)) \times (A_{Koll} m^2) + (115/(P_{rated} \times 11)) \times (V_{Sp} m^3)) \times 0.45 \times ((\eta_{Koll} \%) / 100) \times (\eta_{Sp})$  = + ④ %

Seasonal space heating energy efficiency of package under average climate ⑤ 135 %

*rounded to the nearest integer*


Seasonal space heating energy efficiency class of package under average climate

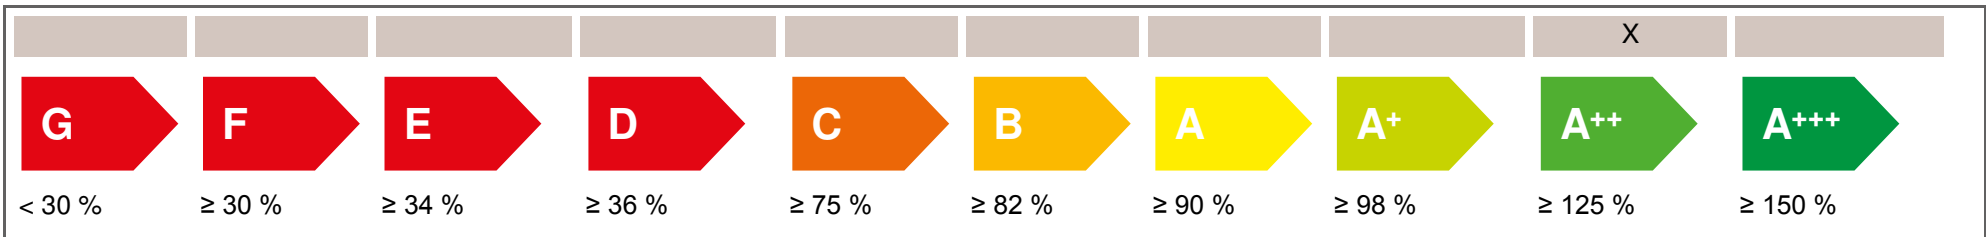



Seasonal space heating energy efficiency under colder and warmer climate conditions

colder	133 %		colder	⑤	135	-V	-2	=	137 %
warmer	132 %		warmer	⑤	135	+VI	1	=	136 %

The energy efficiency of the package of products provided for in this fiche may not correspond to its actual energy efficiency once installed in a building, as the efficiency is influenced by further factors such as heat loss in the distribution system and the dimensioning of the products in relation to building size and characteristics.

<b>Product fiche</b>				
<b>Manufacturer</b>	CTA AG			
<b>Model</b>	OH 28e Duo HT B/W			
<b>Information on energy efficiency class and rated output</b>				
	Average / Low temperature	Average / Medium temperature		
Space heating energy efficiency class	A++	A++	-	
Rated heat output	27.20	24.90	kW	
Seasonal space heating energy efficiency	191	131	%	
Annual final energy consumption space heating	11261	14761	kWh	
Sound power level indoors		54	dB	
<b>Special precautions during assembly, installation or maintenance</b>				
see installation and maintenance instructions				
<b>Additional information</b>				
	Low temperature	Medium temperature		
Rated heat output colder climate	27.20	24.90	kW	
Rated heat output warmer climate	27.20	24.90	kW	
Seasonal space heating energy efficiency colder climate	197	133	%	
Seasonal space heating energy efficiency warmer climate	196	132	%	
Annual final energy consumption colder climate	13084	17351	kWh	
Annual final energy consumption warmer climate	7100	9484	kWh	
Sound power level outdoors		-	dB	
<b>Technical data of the temperature controller</b>				
<b>Manufacturer</b>	Siemens			
<b>Model</b>	RVS 61			
Class of the controller		VII	-	
Contribution of the controller to seasonal space heating energy efficiency		3.5	%	
<b>Contact</b>	CTA AG, Hunzigenstrasse 2, CH-3110 Münsingen			

<b>Model</b>				<b>OH 28e Duo HT B/W</b>						
Brine-to-water heat pump: (Yes/No)				Yes						
Water-to-water heat pump: (Yes/No)				No						
Air-to-water heat pump: (Yes/No)				No						
Low temperature heat pump: (Yes/No)				No						
Equipped with supplementary heater: (Yes/No)				No						
Heat pump combination heater: (Yes/No)				No						
Application: (Low temperature/Medium temperature)				Medium temperature						
Climate: (Colder/Average/Warmer)				Average						
<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>	<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>			
<b>Rated heat output</b>	Prated	24.90	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_S$	131	%			
<b>Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature Tj</b>				<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>						
Tj = -7°C	Pdh	25.10	kW	Tj = -7°C	COPd	3.03	-			
Tj = +2°C	Pdh	26.20	kW	Tj = +2°C	COPd	3.86	-			
Tj = +7°C	Pdh	27.10	kW	Tj = +7°C	COPd	4.61	-			
Tj = +12°C	Pdh	27.90	kW	Tj = +12°C	COPd	5.62	-			
Tj = biv	Pdh	24.90	kW	Tj = biv	COPd	2.84	-			
Tj = TOL	Pdh	24.90	kW	Tj = TOL	COPd	2.84	-			
Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	Tj = -15°C if TOL < -20°C)	COPd	-	-			
Bivalent temperature	T <sub>biv</sub>	-10	°C	Operation limit temperature	TOL	-10	°C			
Cycling interval capacity for heating	P <sub>psych</sub>	-	kW	Cycling interval efficiency	COP <sub>psych</sub>	-	-			
Degradation co-efficient	Cdh	0.9	-	Heating water operating limit temperature	WTOL	65	°C			
<b>Power consumption in modes other than active mode</b>				<b>Supplementary heater</b>						
Off mode	P <sub>OFF</sub>	0.003	kW	Rated heat output	P <sub>sup</sub>	-	kW			
Thermostat-off mode	P <sub>TO</sub>	0.012	kW	Type of energy input	-					
Standby mode	P <sub>SB</sub>	0.003	kW							
Crankcase heater mode	P <sub>CK</sub>	0.003	kW							
<b>Other items</b>										
Capacity control	staged			Rated air flow rate, outdoors	-	-	m <sup>3</sup> /h			
Sound power level, indoors/outdoors	L <sub>WA</sub>	54 / -	dB	Rated brine or water flow rate, outdoor heat exchanger	-	5.5	m <sup>3</sup> /h			
Emissions of nitrogen oxides	NO <sub>x</sub>	-	mg/kWh							
<b>For heat pump combination heater</b>										
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%			
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh			
<b>Contact</b>	CTA AG, Hunzigenstrasse 2, CH-3110 Münsingen									

<b>Model</b>				<b>OH 28e Duo HT B/W</b>							
Brine-to-water heat pump: (Yes/No)				Yes							
Water-to-water heat pump: (Yes/No)				No							
Air-to-water heat pump: (Yes/No)				No							
Low temperature heat pump: (Yes/No)				No							
Equipped with supplementary heater: (Yes/No)				No							
Heat pump combination heater: (Yes/No)				No							
Application: (Low temperature/Medium temperature)				Low temperature							
Climate: (Colder/Average/Warmer)				Average							
<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>	<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>				
<b>Rated heat output</b>	Prated	27.20	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_S$	191	%				
<b>Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature Tj</b>				<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>							
Tj = -7°C	Pdh	27.30	kW	Tj = -7°C	COPd	4.91	-				
Tj = +2°C	Pdh	27.90	kW	Tj = +2°C	COPd	5.62	-				
Tj = +7°C	Pdh	28.30	kW	Tj = +7°C	COPd	6.28	-				
Tj = +12°C	Pdh	28.30	kW	Tj = +12°C	COPd	6.28	-				
Tj = biv	Pdh	27.20	kW	Tj = biv	COPd	4.75	-				
Tj = TOL	Pdh	27.20	kW	Tj = TOL	COPd	4.75	-				
Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	Tj = -15°C if TOL < -20°C)	COPd	-	-				
Bivalent temperature	T <sub>biv</sub>	-10	°C	Operation limit temperature	TOL	-10	°C				
Cycling interval capacity for heating	P <sub>cy</sub>	-	kW	Cycling interval efficiency	COP <sub>cy</sub>	-	-				
Degradation co-efficient	Cdh	0.9	-	Heating water operating limit temperature	WTOL	65	°C				
<b>Power consumption in modes other than active mode</b>				<b>Supplementary heater</b>							
Off mode	P <sub>OFF</sub>	0.003	kW	Rated heat output	P <sub>sup</sub>	-	kW				
Thermostat-off mode	P <sub>TO</sub>	0.012	kW	Type of energy input	-						
Standby mode	P <sub>SB</sub>	0.003	kW								
Crankcase heater mode	P <sub>CK</sub>	0.003	kW								
<b>Other items</b>											
Capacity control	staged			Rated air flow rate, outdoors	-	-	m <sup>3</sup> /h				
Sound power level, indoors/outdoors	L <sub>WA</sub>	54 / -	dB	Rated brine or water flow rate, outdoor heat exchanger	-	5.5	m <sup>3</sup> /h				
Emissions of nitrogen oxides	NO <sub>x</sub>	-	mg/kWh								
<b>For heat pump combination heater</b>											
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%				
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh				
<b>Contact</b>	CTA AG, Hunzigenstrasse 2, CH-3110 Münsingen										