




ENERG

енергия · ενεργεια



I - Klima - Kälte - Wärme

II OH 1-14es - 230 V - W/W Art.Nr.: B11002



55 °C

35 °C



47 dB



--- dB

■ 15.2
 ■ **15.2**
 ■ 15.2
 kW

■ 17.2
 ■ **17.2**
 ■ 17.2
 kW



Package (heat pumps and combination heater with heat pump)

Seasonal space heating energy efficiency of heat pump (η_S) ① 160 %

Rated output of the heat pump (P_{rated} kW) 15.40

Temperature control Class VII (Table 1) + ② 3.5 %

Supplementary boiler

Package with hot water storage tank no P_{sup} kW (rated output of supplementary heater)

η_S % (sup) -

$(\eta_S \% (sup) - ①) \times (\alpha_{WE}) = - ③$ %

(α_{WE})

Solar contribution $(A_{Koll} m^2)$ $(\eta_{Koll} \%)$

$(V_{Sp} m^3)$ $(standstill\ heat\ loss\ of\ the\ storage\ tank\ in\ W)$


(η_{Sp})

$((294/(P_{rated} \times 11)) \times (A_{Koll} m^2) + (115/(P_{rated} \times 11)) \times (V_{Sp} m^3)) \times 0.45 \times ((\eta_{Koll} \%) / 100) \times (\eta_{Sp}) = + ④$ %

Seasonal space heating energy efficiency of package under average climate ⑤ 164 %

rounded to the nearest integer


Seasonal space heating energy efficiency class of package under average climate

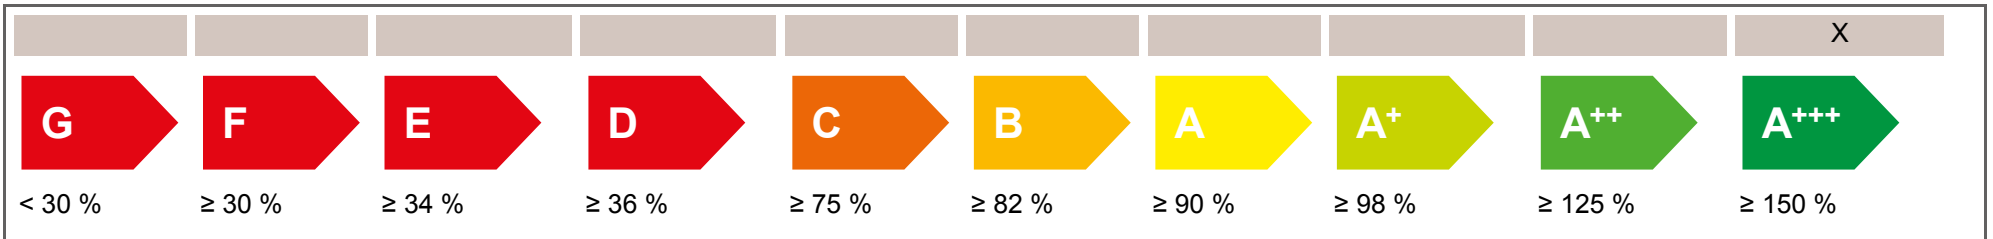



Seasonal space heating energy efficiency under colder and warmer climate conditions

colder	163 %		colder ⑤	164	-V	-3	=	167 %
warmer	161 %		warmer ⑤	164	+VI	1	=	165 %

The energy efficiency of the package of products provided for in this fiche may not correspond to its actual energy efficiency once installed in a building, as the efficiency is influenced by further factors such as heat loss in the distribution system and the dimensioning of the products in relation to building size and characteristics.

Product fiche		 AC Cooling Heating		
Manufacturer	CTA AG			
Model	OH 1-14es 230V W/W			
Information on energy efficiency class and rated output				
	Average / Low temperature	Average / Medium temperature		
Space heating energy efficiency class	A++	A++	-	
Rated heat output	17.30	15.40	kW	
Seasonal space heating energy efficiency	243	160	%	
Annual final energy consumption space heating	5656	7539	kWh	
Sound power level indoors		50	dB	
Special precautions during assembly, installation or maintenance				
see installation and maintenance instructions				
Additional information				
	Low temperature	Medium temperature		
Rated heat output colder climate	17.30	15.40	kW	
Rated heat output warmer climate	17.30	15.40	kW	
Seasonal space heating energy efficiency colder climate	250	163	%	
Seasonal space heating energy efficiency warmer climate	247	161	%	
Annual final energy consumption colder climate	6598	8848	kWh	
Annual final energy consumption warmer climate	3586	4838	kWh	
Sound power level outdoors		-	dB	
Technical data of the temperature controller				
Manufacturer	Siemens			
Model	RVS 61			
Class of the controller		VII	-	
Contribution of the controller to seasonal space heating energy efficiency		3.5	%	
Contact	CTA AG, Hunzigenstrasse 2, CH-3110 Münsingen			

Model				OH 1-14es 230V W/W						
Brine-to-water heat pump: (Yes/No)				No						
Water-to-water heat pump: (Yes/No)				Yes						
Air-to-water heat pump: (Yes/No)				No						
Low temperature heat pump: (Yes/No)				No						
Equipped with supplementary heater: (Yes/No)				Yes						
Heat pump combination heater: (Yes/No)				No						
Application: (Low temperature/Medium temperature)				Medium temperature						
Climate: (Colder/Average/Warmer)				Average						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output	Prated	15.40	kW	Seasonal space heating energy efficiency	η_S	160	%			
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj						
Tj = -7°C	Pdh	15.70	kW	Tj = -7°C	COPd	3.59	-			
Tj = +2°C	Pdh	16.70	kW	Tj = +2°C	COPd	4.70	-			
Tj = +7°C	Pdh	17.20	kW	Tj = +7°C	COPd	5.67	-			
Tj = +12°C	Pdh	17.80	kW	Tj = +12°C	COPd	7.05	-			
Tj = biv	Pdh	15.40	kW	Tj = biv	COPd	3.33	-			
Tj = TOL	Pdh	15.40	kW	Tj = TOL	COPd	3.33	-			
Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	Tj = -15°C if TOL < -20°C)	COPd	-	-			
Bivalent temperature	T _{biv}	-10	°C	Operation limit temperature	TOL	-10	°C			
Cycling interval capacity for heating	P _{cy}	-	kW	Cycling interval efficiency	COP _{cy}	-	-			
Degradation co-efficient	Cdh	0.9	-	Heating water operating limit temperature	WTOL	65	°C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P _{OFF}	0.003	kW	Rated heat output	P _{sup}	-	kW			
Thermostat-off mode	P _{TO}	0.012	kW	Type of energy input	-					
Standby mode	P _{SB}	0.003	kW							
Crankcase heater mode	P _{CK}	0.003	kW							
Other items										
Capacity control	fixed			Rated air flow rate, outdoors	-	-	m ³ /h			
Sound power level, indoors/outdoors	L _{WA}	50 / -	dB	Rated brine or water flow rate, outdoor heat exchanger	-	3.8	m ³ /h			
Emissions of nitrogen oxides	NO _x	-	mg/kWh							
For heat pump combination heater										
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%			
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh			
Contact	CTA AG, Hunzigenstrasse 2, CH-3110 Münsingen									

Model				OH 1-14es 230V W/W						
Brine-to-water heat pump: (Yes/No)				No						
Water-to-water heat pump: (Yes/No)				Yes						
Air-to-water heat pump: (Yes/No)				No						
Low temperature heat pump: (Yes/No)				No						
Equipped with supplementary heater: (Yes/No)				Yes						
Heat pump combination heater: (Yes/No)				No						
Application: (Low temperature/Medium temperature)				Low temperature						
Climate: (Colder/Average/Warmer)				Average						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output	Prated	17.30	kW	Seasonal space heating energy efficiency	η_S	243	%			
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj						
Tj = -7°C	Pdh	17.40	kW	Tj = -7°C	COPd	6.08	-			
Tj = +2°C	Pdh	17.80	kW	Tj = +2°C	COPd	7.05	-			
Tj = +7°C	Pdh	18.10	kW	Tj = +7°C	COPd	7.96	-			
Tj = +12°C	Pdh	18.30	kW	Tj = +12°C	COPd	8.70	-			
Tj = biv	Pdh	17.30	kW	Tj = biv	COPd	5.87	-			
Tj = TOL	Pdh	17.30	kW	Tj = TOL	COPd	5.87	-			
Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	Tj = -15°C if TOL < -20°C)	COPd	-	-			
Bivalent temperature	T _{biv}	-10	°C	Operation limit temperature	TOL	-10	°C			
Cycling interval capacity for heating	P _{cy}	-	kW	Cycling interval efficiency	COP _{cy}	-	-			
Degradation co-efficient	Cdh	0.9	-	Heating water operating limit temperature	WTOL	65	°C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P _{OFF}	0.003	kW	Rated heat output	P _{sup}	-	kW			
Thermostat-off mode	P _{TO}	0.012	kW	Type of energy input	-					
Standby mode	P _{SB}	0.003	kW							
Crankcase heater mode	P _{CK}	0.003	kW							
Other items										
Capacity control	fixed			Rated air flow rate, outdoors	-	-	m ³ /h			
Sound power level, indoors/outdoors	L _{WA}	50 / -	dB	Rated brine or water flow rate, outdoor heat exchanger	-	3.8	m ³ /h			
Emissions of nitrogen oxides	NO _x	-	mg/kWh							
For heat pump combination heater										
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%			
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh			
Contact	CTA AG, Hunzigenstrasse 2, CH-3110 Münsingen									